




HEAT-ASSISTED TOP ROLLER LAMINATOR

Professional heat-assisted top roller laminator for self-adhesive materials. It allows to laminate and mount.
Designed to be reliable and easy-to-use for perfect and high quality results.

- > Cost-effective: very good quality, price and performance
 - > Excellent results without air bubbles and defects
 - > It mounts images on panels, applies double-sided adhesive films, application tape and protective film
 - > Compact dimensions
 - > Ideal for the small and medium sized user
- User-friendly control panel with new roller pressure indicator: best results guaranteed avoiding "overpressure" when mounting and laminating (typical "smile" effect)
- New motorized lifting of the upper roller for an effortless and faster lamination available (optional)
- > Ergonomic position of the shafts for easy adjustments of the media
 - > Versatility in the materials used
 - > Load and unload of media rolls in seconds

SUITABLE FOR:

- Rigid and flexible indoor displays
- Floor graphics
- Backlit displays
- Pop-up & trade shows graphics
- Roll-up banners
- Board mounts
- Outdoor signs
- Car wrapping
- Many more..

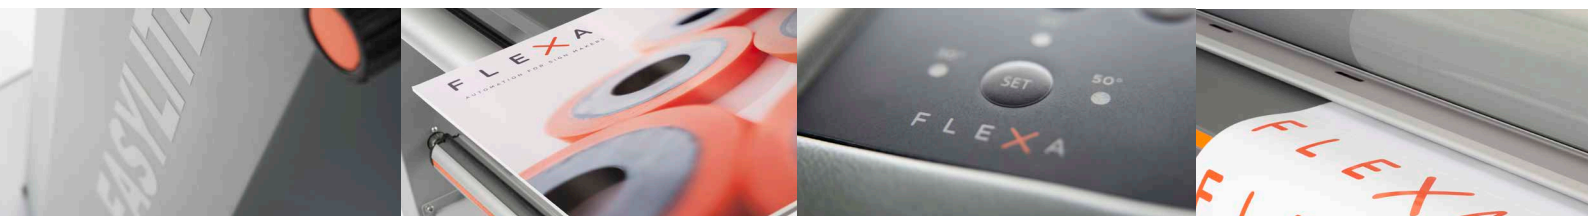



New motorized lifting of the upper roller (optional)



New roller pressure display



Millimeter scale on each shaft for the right positioning of the media



Aluminum shafts with automatic locking system



Swing-up steel feed table for quick set-up



Front tray for prints (optional)



Photosensitive cells with automatic self-control of safety devices and emergency buttons


Rewinding shaft for adjusting the tension of the material

Unwinding shaft for adjusting the tension of the material

Unwinding shaft for printed media in rolls

Front unwinding shaft (optional)

Rear rewinding shaft (optional)



Feed-in guide (optional)

Feeding control by hand (control panel) or foot pedal (hand free operation)



Rear table with cutting unit (optional)

Working width	1600 mm (63 in)
Max. space between rollers	30 mm (1,2 in)
Coated rubber rollers	Ø 116 mm (4,6 in)
Heated upper roll preset	30°, 40°, 50° C (86°, 104°, 122° F)
Max. speed	5 m/min (16 ft/min)
Working height	900 mm (35 in)
Power supply	230 V - 50 Hz - 2500 W
Dimensions (W x D x H)	2000 x 650 x 1500 mm (79 x 26 x 59 in)
Weight	215 kg (474 lbs)
Packing Dimensions (W x D x H)	2150 x 850 x 1700 mm (85 x 33 x 67 in)
Packing Weight	260 kg (573 lbs)

Distributor

Manufactured in compliance with CE regulations



100% Made by FLEXA



100% Made in Italy

Follow us:

